



# TC Series Clean Steam Thermostatic Traps

Stainless Steel 316L

For Pressures to 8,3 bar...Capacities to 1 700 kg/h

Armstrong offers a complete range of T-316L stainless steel clean steam thermostatic traps to handle the special requirements of clean steam systems. Different body configurations allow for choice of piping and ease of cleaning.

The thermostatic design is free-draining and can operate close to steam temperature at any given pressure.

## Features:

- Constructed of 316L stainless steel for corrosion resistance
- Highly polished for cleanability
- Self-draining to minimize contamination
- Compact and lightweight
- Easy to install
- Provide easy disassembly for cleaning

## Typical Applications:

- Fermentors
- Sterilizers/autoclaves
- Process piping
- Block and bleed
- Bioreactors
- CIP/SIP systems
- Equipment sterilization
- Sterile barriers

## How to Order:

Specify:

- Model number
- Pipe connection size
- End connection type

Example:

TC-C, 1/2" sanitary end connections.



Steam Traps

Model	TC-C Clamp	TC-R Repairable	TC-S Sealed
Cap and body	ASTM A479 316L		
Bellows	316L stainless steel		
Body gasket	Viton		–
Retainer	Stainless steel		
Clamp	Stainless steel	–	–
Screws	–	Stainless steel	–
Finish	180 grit electro polish to 20 ra or below inside, and 150 grit electro polish to 30 ra or below on outside	–	–

All models comply with the article 3.3 of the PED (97/23/EC).

Model	TC-C Clamp	TC-R Repairable	TC-S Sealed
Maximum Allowable Pressure (Vessel Design)	8,3 bar		10 bar
Maximum Allowable Temperature	177°C		186°C
Maximum Operating Pressure	7 bar		8,3 bar
Weight in kg	0,57	0,68	0,34

Maximum back pressure: 99% of inlet pressure

Differential Pressure*	5°C Subcool	11°C Subcool
	kg/h	kg/h**
0,35 bar	82	145
0,7	163	293
1,4	307	503
2,1	458	709
2,8	561	830
3,5	699	915
4,1	837	1 136
4,8	924	1 210
5,5	1 071	1 356
6,2	1 116	1 468
6,9	1 155	1 565
7,6	1 184	1 651
8,3	1 206	1 712

\* Capacities based on differential pressure with no back pressure.

\*\* Capacities will vary with the degree of subcooling. When greater capacities are required, the trap will automatically adjust to the load, up to the maximum (cold water) capacity shown, by increasing the amount of subcooling.

**All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.**

Armstrong International SA • Parc Industriel des Hauts-Sarts (2<sup>e</sup> Avenue) • 4040 Herstal • Belgium

Tel.: +32 (0)4 240 90 90 • Fax: +32 (0)4 240 40 33

www.armstronginternational.eu • info@armstronginternational.eu


# TC Series Clean Steam Thermostatic Traps

Stainless Steel 316L


For Pressures to 8,3 bar...Capacities to 1 700 kg/h




Steam Traps

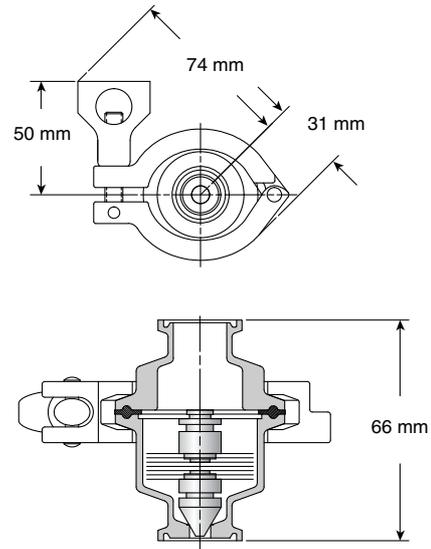


**Model TC-C Clamp**  
**With Sanitary Body Clamp**  
 1/2", 3/4 and 1" Sanitary End Connections

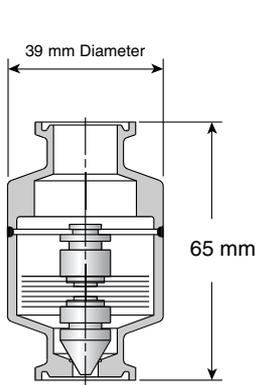


**Model TC-S Sealed**  
 1/2" and 3/4"  
 Sanitary End Connections

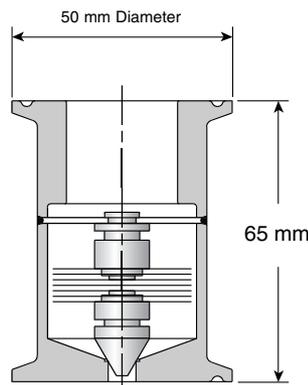


**Model TC-S Sealed**  
 1"  
 Sanitary End Connections

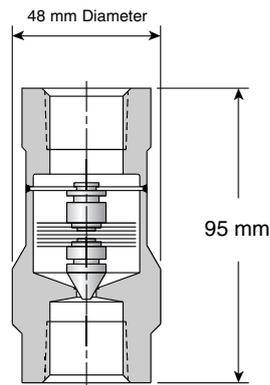


**Model TC-S Sealed**  
 1/2" and 3/4"  
 Threaded End Connections

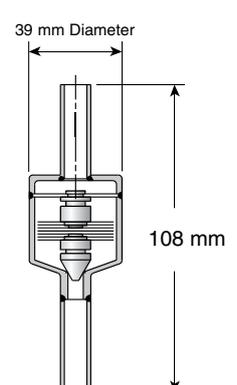


**Model TC-S Sealed**  
 1/2" and 3/4"  
 Tube End Connections

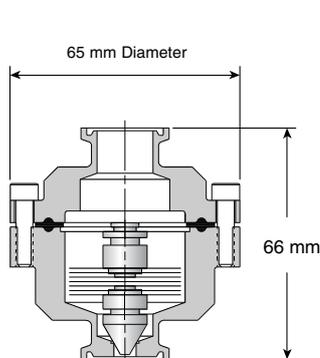

**Model TC-R Repairable**  
**With Bolted Body and Cap**  
 1/2", 3/4 and 1"  
 Sanitary End Connections

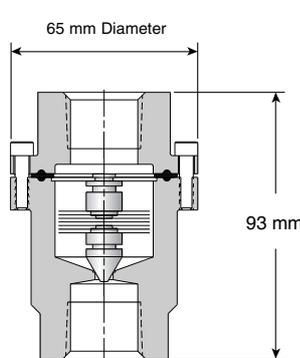

**Model TC-R Repairable**  
**With Bolted Body and Cap**  
 1/2" and 3/4"  
 Threaded End Connections

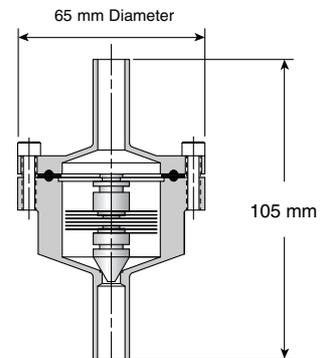

**Model TC-R Repairable**  
**With Bolted Body and Cap**  
 1/2" and 3/4"  
 Tube End Connections

*All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.*