

The BA378E is a two input intrinsically safe instrument that may be configured as a Timer or as a Clock. As a Timer it is able to measure and display the elapsed time between external events, or control external events via the status and optional control outputs. When configured as a Clock the instrument can display time in a variety of formats. The BA378E is controlled by two inputs which may be independently configured on-site to operate with a magnetic pick-off, switch contact, proximity detector, open collector or a voltage output sensor. International intrinsic safety certification permits worldwide installation, and a slide-in scale card simplifies identification.

Configuration may be performed on-site via the front panel push buttons using the easy to use and well documented menus. The Timer employs a *state* and *event* structure to simplify configuration. The BA378E can be supplied configured to customers requirements including a customer defined printed scalecard for no additional charge.

Applications as a Timer include simply displaying the time interval between two events detected by one or two hazardous area sensors such as 2-wire proximity detectors. The Timer can control an external event using the isolated open collector status output if only a single output is required. If it is required to switch more than one circuit, additional dual isolated control outputs are available as a factory fitted option. The Timer is able to perform common industrial timing application such as those associated with dosing or sampling where an intrinsically safe solenoid valve is required to be opened for a defined time. The Timer includes a powerful cycle function which can be configured to repeat the timing function up to 99 times or continuously, with up to 100 hours delay between timed periods.

As a Clock local time can be displayed in various twelve or twenty four hour formats and the display may be synchronised to a pre-set time via the external reset input.

Optional control outputs may be configured to switch loads *on* or *off* at pre-set times twice during each twenty four hour period.

The display has high contrast and a wide viewing angle, enabling the instrument to be read in most lighting conditions over a wide temperature range.

IP66 front panel protection with a neoprene gasket to seal the joint between the instrument and the instrument panel allows the BA378E to be installed in areas that will be washed down.

International intrinsic safety certification permits the BA378E to be installed worldwide. When configured to operate with a sensors having a voltage or magnetic pick-up output, the input terminals comply with the requirements for *simple apparatus* reducing system design and documentation.

Display backlighting which is internally powered, is available as a factory fitted option. It provides green background illumination enhancing daylight viewing and allowing the display to be easily read at night or when installed in a poorly illuminated area.

Optional control outputs can switch hazardous area loads such as a sounder or solenoid valve, or safe area loads via a Zener barrier or isolator. The two galvanically isolated, solid state voltage free outputs may be independently conditioned with normally open or closed outputs. Annunciators on the BA378E display show the status of both control outputs.

When panel space is limited the intrinsically safe BA377E single input Timer or Clock provide similar features in a smaller 94 x 48mm enclosure. The BA377E-SS is identical to the BA377E except that it is housed in a rugged stainless steel enclosure with a 10mm thick window that may be installed in an Ex e, Ex n, Ex p or Ex t panel enclosure without invalidating the enclosure's certification. The BA377NE has Ex nA and Ex tc certification allowing installation in Zone 2 or 22 without Zener barriers or galvanic isolators.

BA378E

Two input timer or clock

Intrinsically safe for use in all gas hazardous areas

- ◆ **Configurable inputs:** magnetic pick-off, switch contact, proximity detector, open collector or voltage pulse.
- ◆ **Separate displays**
- ◆ **Intrinsically safe**
- ◆ **144 x 72mm DIN enclosure with IP66 front protection.**
- ◆ **Isolated status output**
- ◆ **Optional:**
Backlight
Dual controls outputs
- ◆ **3 year guarantee**

www.beka.co.uk/ba378e




BEKA associates

BEKA associates Ltd. Old Charlton Rd. Hitchin, Hertfordshire, SG5 2DA, U.K.
Tel. (01462) 438301 Fax (01462) 453971
e-mail sales@beka.co.uk www.beka.co.uk


SPECIFICATION

| | | |
|---|--|-----------------------------------|
| Power supply | | |
| Voltage | 10 to 28V from a Zener barrier or galvanic isolator. | |
| Current | 22mA max plus 16mA for the optional backlight. | |
| Input A & b | | |
| Switch contact | Lower | Upper switching thresholds |
| Proximity detector (NAMUR) | 100Ω | 1kΩ |
| Open collector | 1.2mA | 2.1mA |
| Magnetic pick-off | 2kΩ | 10kΩ |
| Voltage pulse (low) | 0 | +40mV |
| Voltage pulse (high) | 1V | 3V 28V max |
| | 3V | 10V 28V max |
| Display | | |
| Type | Liquid crystal | |
| Primary | 18mm high | |
| Secondary | 12mm high | |
| Format | hh:mm:ss ; hh:mm ; mm:ss or s | |
| Remote Timer reset & Clock sync. | | |
| | Contact closure with resistance less than 10kΩ. | |
| Timer | | |
| Status output | Isolated, voltage free, open collector, certified as a separate intrinsically safe complying with the requirements for <i>simple apparatus</i> . | |
| Ron | 51Ω + 3V max | |
| Roff | 1MΩ min | |
| I max | 10mA | |
| Maximum duration | 99h 59m and 59s or equivalent in any display format. | |
| Maximum delay between cycles. | 99h 59m and 59s or equivalent in any display format. | |
| Grand total run-time | 5x10 ⁶ hours maximum | |
| Clock | | |
| Timekeeping accuracy | Less than ±0.43s error per day over operating temperature range. | |
| Intrinsic safety | | |
| Europe ATEX | Group II Category 1G Ex ia IIC T5 Ga | |
| Code | -40°C ≤ Ta ≤ 70°C | |
| Cert. No. | ITS16ATEX28408X | |
| International IECEx | Ex ia IIC T5 Ga | |
| Code | -40°C ≤ Ta ≤ 70°C | |
| Cert. No | IECEx ITS 16.0004X | |
| ETL & cETL | Class I Div 1 Gp A, B, C, D T5 (USA & Canada) | |
| Code | Class II Div 1 Gp E, F, G. Class III Div 1 (USA & Canada) | |
| | Class I Zone 0 AEx ia IIC T5 Ga (USA) | |
| | Ex ia IIC T5 Ga (Canada) | |
| | -40°C ≤ Ta ≤ 70°C | |
| Nonincendive USA & Canada | | |
| Code | ETL & cETL | |
| | Class I Div 2 Gp A, B, C, D T5 | |
| | Class II Div 2 Gp F, G. Class III Div 2 | |
| | -40°C ≤ Ta ≤ 70°C | |
| ETL Control No. | 4008610 | |
| Environmental | | |
| Operating temp | -40 to +70°C display -20 to +70°C | |
| Storage temp | -40 to +85°C | |
| Humidity | to 95% at 40°C non condensing | |
| Vibration | Report available | |
| Enclosure | Noryl SE1GFN3. Front IP66, rear IP20 | |
| EMC | Complies with EMC Directive 2014/30/EU | |
| Mechanical | | |
| Terminals | Screw clamp for 0.5 to 1.5mm ² cable, removable terminal blocks. | |
| Weight | 0.35kg | |
| Accessories | | |
| Backlight | Green LED internally powered | |
| Control outputs | Two outputs each of which may be independently configured as a NO or NC output. | |

DIMENSIONS (mm)

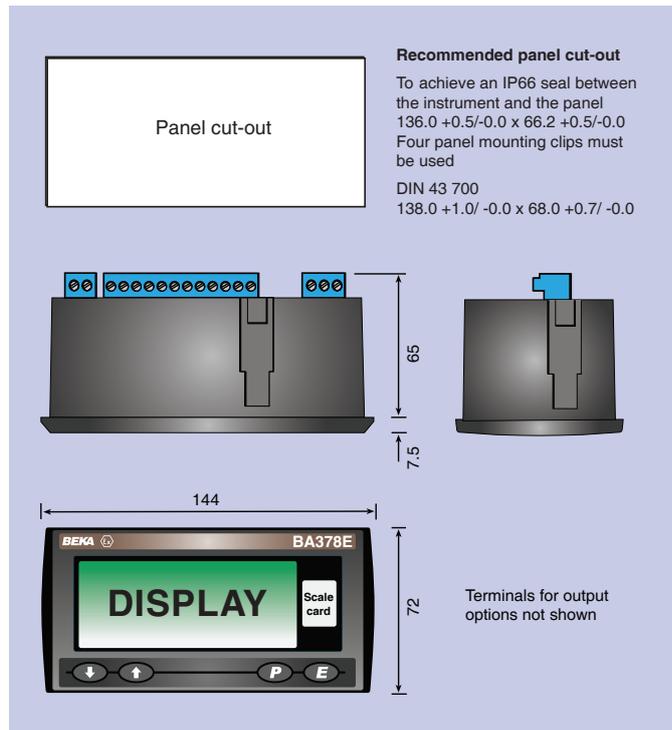

TERMINAL CONNECTIONS

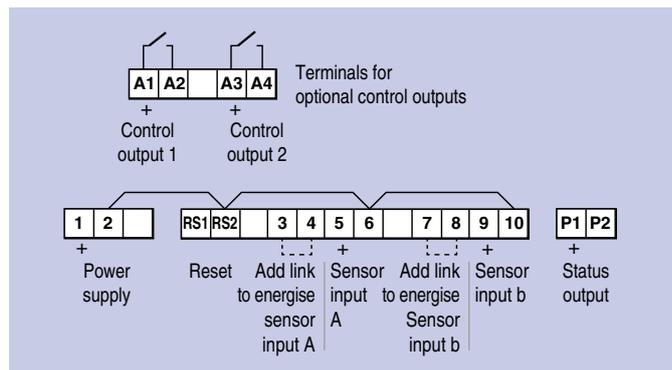

| | |
|---------------------------------------|---|
| Outputs | Isolated single pole, voltage free solid state switch. |
| Ron | 5Ω + 0.7V max |
| Roff | 1MΩ min |
| Scale card | Blank card fitted to all instruments. Can be supplied typeset with specified units of measurement for no additional charge at time of purchase. ~ |
| Tag legend | Specified tag number or application printed onto rear of instrument. ~ |
| ~ See accessory datasheet for details | |

HOW TO ORDER

| | |
|-------------------|---|
| Model number | Please specify BA378E |
| Function | Timer or Clock |
| Input | Type for each input * |
| Accessories | Please specify if required |
| Display backlight | Backlight |
| Control outputs | Control outputs |
| Scale card | Legend required |
| Tag | No charge if ordered with instrument. Legend required |

* BA378E can be supplied configured as required for no additional charge, see instruction manual, which can be downloaded from www.beka.co.uk/ba378e for details. If configuration information is not supplied, instrument will be configured as a Timer with an open collector input. Can easily be reconfigured on-site.